

MapleMBSE 2021.0 Virtual Features Guide

**Copyright © Maplesoft, a division of Waterloo Maple Inc.
2021**

MapleMBSE 2021.0 Virtual Features Guide

Contents

Preface	ix
1 Introduction	1
1.1 Scope and Purpose of this Document	1
1.2 Prerequisite Knowledge	1
1.3 Motivation for Using MapleMBSE Virtual Features	1
1.4 Importing the MapleMBSE Ecore	3
1.5 General Syntax for the MapleMBSE Virtual Features	3
2 Stereotypes	5
2.1 metaclassName	5
Description	5
Syntax	5
Using the metaclassName Virtual Feature	5
Example	6
2.2 featureName	6
Description	6
Syntax	7
Using the featureName Virtual Feature	7
Example	8
2.3 stereotypeNames	9
Description	9
Syntax	9
Using the stereotypeNames Virtual Feature	9
Example	10
3 Associations	11
3.1 associatedProperty	11
Description	11
Syntax	11
Using the associatedProperty Virtual Feature	12
Example	13
3.2 directedAssociatedProperty	14
Description	14
Syntax	14
Using the directAssociatedProperty Virtual Feature	14
Example	15
3.3 otherAssociatedEnd	16
Description	16
Syntax	16
Using the otherAssociatedEnd Virtual Feature	16
Example	17
4 Connectors	21
4.1 connectedPropertyOrPort	21

Description	21
Syntax	21
Using the connectedPropertyOrPort virtual feature	22
Example	22
4.2 otherConnectorEnd	23
Description	23
Syntax	23
Using the otherConnectorEnd Virtual Feature	23
Example	23
5 Dependencies	25
5.1 clientDependencies	25
Description	25
Syntax	25
Using the clientDependencies Virtual Feature	25
Example	25
5.2 supplierDependencies	26
Description	26
Syntax	27
Using the supplierDependencies Virtual Feature	27
Example	28
6 Enumeration	29
6.1 EnumerationName	29
Description	29
Syntax	29
Using the VertexTransition Virtual Feature	29
Example	30
6.2 EnumerationLabel	30
Description	30
Syntax	30
7 Util	33
7.1 multiplicityProperty	33
Description	33
Syntax	33
Using the multiplicityProperty Virtual Feature	33
Example	34
8 Activity Diagrams	35
8.1 ActivityControlFlow	35
Description	35
Syntax	35
Using the ActivityControlFlow Virtual Feature	35
Example	36
8.2 ActivityObjectFlow	37
Description	37

Syntax	37
Using the ActivityObjectFlow Virtual Feature	37
Example	38
9 StateMachines	39
9.1 VertexTransition	39
Description	39
Syntax	39
Using the VertexTransition Virtual Feature	39
Example	40
10 Comments	41
10.1 ownedComments	41
Description	41
Syntax	41
Using the ownedComments Virtual Feature	41
Example	42
11 Slots	45
11.1 SlotValue	45
Description	45
Syntax	45
Using the SlotValue Virtual Feature	46
Example	47
11.2 InstanceTree	47
Description	47
Syntax	48
Using the InstanceTree Virtual Feature	48
Example	49
11.3 InstanceWithSlots	50
Description	50
Syntax	50
Using the InstanceWithSlots Virtual Feature	50
Example	51
11.4 RecursiveInstanceWithSlots	51
Description	51
Syntax	52
Using the RecursiveInstanceWithSlots Virtual Feature	52
Example	53
11.5 AttachedFile	53
Description	53
Syntax	53
Using the attachedFile Virtual Feature	54
Example	54
11.6 Slots	54
Description	54

Syntax	54
Using the Slots Virtual Feature	54
Example	55
12 Recursivity	57
12.1 getRecursively	57
Description	57
Syntax	57
Using the getRecursively Virtual Feature	58
Example	58

List of Figures

Figure 2.1: metaclassName Example	6
Figure 2.2: A The appliedStereotypeInstance Structure	7
Figure 2.3: featureName Example	8
Figure 2.4: stereotypeNames Example	10
Figure 3.1: associatedProperty Example	13
Figure 3.2: directAssociatedProperty Example	15
Figure 3.3: otherAssociatedEnd Example	18
Figure 4.1: connectedPropertyOrPort Example	22
Figure 4.2: otherConnectorEnd Example	24
Figure 5.1: clientDependencies Example	26
Figure 5.2: supplierDependencies Example	28
Figure 7.1: multiplicityProperty Example	34
Figure 8.1: ActivityControlFlow Example	36
Figure 8.2: ActivityObjectFlow Example	38
Figure 9.1: VertexTransition Example	40

Preface

MapleMBSE Overview

MapleMBSE™ gives an intuitive, spreadsheet based user interface for entering detailed system design definitions, which include structures, behaviors, requirements, and parametric constraints.

Related Products

MapleMBSE 2021 requires the following products.

- Microsoft® Excel® 2010 Service Pack 2, Excel 2016 or Excel 2019.
- Oracle® Java® SE Runtime Environment 8.

Note: MapleMBSE looks for a Java Runtime Environment in the following order:

1) If you use the `-vm` option specified in **OSGiBridge.init** (not specified by default), MapleMBSE will use it.

2) If your environment has a system JRE (meaning either: JREs specified by the environment variables `JRE_HOME` and `JAVA_HOME` in this order, or a JRE specified by the Windows Registry (created by JRE installer)), MapleMBSE will use it.

3) The JRE installed in the MapleMBSE installation directory.

If you are using IBM® Rational® Rhapsody® with MapleMBSE, the following versions are supported:

- Rational Rhapsody Version 8.1.5, 8.3 and 8.4
- Teamwork Cloud™ server 18.5 SP3 or 19.0 SP4

If you are using Eclipse Capella™ with MapleMBSE, the following version is supported:

- 1.4.0
- Note that the architecture of the supported non-server products (that is, 32-bit or 64-bit) must match the architecture of your MapleMBSE architecture.

Related Resources

Resource	Description
MapleMBSE Installation Guide	System requirements and installation instructions for MapleMBSE. The MapleMBSE Installation Guide is available in the Install.html file located either on your MapleMBSE installation DVD or the folder where you installed MapleMBSE.
MapleMBSE Applications	Applications in this directory provide a hands on demonstration of how to edit and construct models using MapleMBSE. They, along with an accompanying guide, are located in the Application subdirectory of your MapleMBSE installation.
MapleMBSE Configuration Guide	This guide provides detailed instructions on working with configuration files and the configuration file language.
MapleMBSE User Guide	Instructions for using MapleMBSE software. The MapleMBSE User Guide is available in the folder where you installed MapleMBSE.
Frequently Asked Questions	You can find MapleMBSE FAQs here: https://faq.maplesoft.com
Release Notes	The release notes contain information about new features, known issues and release history from previous versions. You can find the release notes in your MapleMBSE installation directory.

For additional resources, visit http://www.maplesoft.com/site_resources.

Getting Help

To request customer support or technical support, visit <http://www.maplesoft.com/support>.

Customer Feedback

Maplesoft welcomes your feedback. For comments related to the MapleMBSE product documentation, contact doc@maplesoft.com.

1 Introduction

1.1 Scope and Purpose of this Document

The purpose of the MapleMBSE Virtual Features Guide is to describe MapleMBSE virtual features and explain how to use them.

The intended audience for this document are users who are familiar with UML, SysML and Model-based Systems Engineering concepts and who intend to create their own MapleMBSE configuration files.

1.2 Prerequisite Knowledge

To fully understand the information presented in this document the reader should be familiar with the following concepts:

- The Eclipse Modeling Framework *ecore* serialization. In particular, knowing how to use any tool of your choice to track all the *eReferences* independently of the *eSuperTypes*.
- Thus, some basic concepts of Meta Object Facility like *eClassifiers* and *eStructuralFeatures*. A correct mse configuration file has within each qualifier a concrete UML *eClassifiers* and each dimension should be accessed using a non-derived *StructuralFeature* defined in the UML *.ecore* or a virtual one inside this guide.
- MapleMBSE Configuration Language elements (especially dimension and qualifiers, and the syntax for importing the MapleMBSE *ecore*). For more information on the MapleMBSE Configuration language, see the **MapleMBSE Configuration Guide**.

1.3 Motivation for Using MapleMBSE Virtual Features

SysML provides a high level of abstraction to cover as many modeling scenarios as possible with the diagrams offered. It is a powerful and complex language that is extremely difficult to master because of its complexity (there are hundreds of pages of technical specifications for SysML).

Many different concrete and abstract *Classifiers*, with very specific semantics, are part of the SysML technical specifications. These *Classifiers* should not be used interchangeably. Even "linking" elements changes depending on the "linked" elements. For example, SysML *Associations* are to *Classes* as *Connectors* are to *Ports*, or, what *ControlFlows* can be for *ActivityNodes*. However, these elements are not interchangeable.

An end user, defined as a user who will be updating model information using the MapleMBSE spreadsheet interface but likely will not be involved in creating or editing configuration files, who interested in taking advantage of the modeling capabilities of SysML, should not need to know its complexities. MapleMBSE helps to hide this complexity

from the end user, through virtual features. They are called virtual features because, although they extend the capabilities of native SysML, they themselves are not part of SysML.

With the right choice of labels within an Excel template and a well designed configuration (.mse) file that implements MapleMBSE virtual features, an end user can enter a couple of inputs in a spreadsheet and create *Blocks* and the Associations linking them, or Ports and Connectors, or other combinations of elements.

For example, consider the following code snippet from a MapleMBSE configuration file in the figure below. This figure illustrates the scenario where a configuration file is designed without the use of virtual features to represent SysML *Associations* between *Blocks*.

Notice in the generated Excel worksheet, the number of inputs required of the end user to represent the *Association* between **Customer** and **Product**. This requires knowledge of SysML on the part of the end user.

Creating a configuration file without MapleMBSE virtual features results in an excel file that requires more input from the end user and requires the end user to know SysML to add elements to the spreadsheet.

```

1  svtstable-schema Schema2(hsc: BlockSchema, asc: AssociationSchema) {
2  record dim [Model] {
3    key column /name as mName
4  }
5
6  alternative {
7    group {
8      record dim /packagedElement[Class | asc::metaclassName=="SysML::Blocks::Block"] {
9        key column /name as cName
10     }
11
12     record dim /ownedAttribute[Property] {
13       key column /name as pName
14       reference-query .type @ typeRef
15       reference-decomposition typeRef = hsc {
16         foreign-key column blockName as blockRef
17       }
18       reference-query .association @ associationRef
19       reference-decomposition associationRef = asc {
20         foreign-key column associationName as ascRef
21       }
22     }
23   }
24   record dim /packagedElement[Association] {
25     key column /name as aName
26   }
27 }
28 }
29
30 worksheet-template Template2(sch: Schema2) {
31   vertical table tabl at (2, 1) = sch {
32     key field mName : String
33     key field cName : String
34     key field aName : String
35     key field pName : String
36     key field blockRef : String
37     key field ascRef : String
38   }
39 }
  
```

Package	Block name	Association name	Property name	Name of property's type	name of property's association
Model	Customer				
Model	Product				
Model		purchases			
Model	Customer		boughtItem	Product	purchases
Model	Product		buyer	Customer	purchases

Now consider an example that represents the same Association between Customer and Product, as shown in the figure below. This time, the configuration file is designed using the MapleMBSE virtual features, specifically, the associatedProperty virtual feature. Notice, the only inputs required of the end user are the two SysML *Blocks*, **Customer** and **Product**. The cross-references need for the Association are completed automatically.

```

1  synctable-schema Schema(msg: BlockSchema) {
2    record dim [Class | msg::metaclassName="SysML::Blocks::Block"] {
3      key column /name as cName
4    }
5  }
6  dim /ownedAttribute[Property].msg::associatedProperty[Class] @ classRef {
7    reference-decomposition classRef = msg {
8      foreign-key column blockName as refCName
9    }
10 }
11 }
12 }
13 worksheet-template Template(sch: Schema) {
14   vertical table tabl at (2, 1) = sch {
15     key field cName : String
16     key field refCName : String
17   }
18 }

```

Creating a configuration file that uses MapleMBSE virtual features results in an excel file that requires much less input from the end user and the end user does not need to know uml to create Association.

Block	Target block
Product	Customer
Customer	Product

1.4 Importing the MapleMBSE Ecore

Loading MapleMBSE virtual features is analogous to the way you would load UML Structural Features using UML Ecore. The corresponding MapleMBSE Configuration language uses `import-ecore`.

The general syntax is

```
import-ecore "URI"
```

For example, to specify the NoMagic ecore:

```
"http://www.nomagic.com/magicdraw/UML/2.5"
```

To specify the MapleMBSE ecore:

```
"http://maplembse.maplesoft.com/common/1.0"
```

You must create an alias for the `ecore` using the syntax:

```
import-ecore "URI" as Alias
```

For example, to specify an alias for the MapleMBSE ecore:

```
import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
```

This allows you to use the short form, `mse`, instead of the whole syntax.

1.5 General Syntax for the MapleMBSE Virtual Features

The general syntax for the virtual features is

```
[./]?alias::virtualfeature
```

The first character can be a dot, a forward slash, or a blank. There is no strict rule of thumb for this. For specific syntax, see the Syntax subsection for each virtual feature.

`alias` - This is the alias for the ecore import

`virtualfeature` - This is the virtual feature name you want to use, for example, `associatedProperty`.

2 Stereotypes

SysML can be explained as a subset of elements defined in the UML specifications plus some additional features not included in UML. One of these features is a *Stereotype*. *Stereotypes* are applied to those elements adding extra meaning or modeling semantics. MapleMBSE offers several virtual features to apply *Stereotypes* and navigate their extended modeling capacities.

2.1 metaclassName

Description

Use the **metaclassName** virtual feature to apply *Stereotypes* while creating elements using MapleMBSE. To use this virtual feature you need to identify the qualified name of the *Stereotype* that you want to apply and whether the element is compatible with that stereotype.

Syntax

Any *Element* of the *Model* can have a list of *appliedStereotype* but only certain *Stereotypes* should be applied to certain *Element*. This is one of the few virtual features that is used as a filter inside the qualifier and it does not require a dot or slash notation prior to the alias. The **metaclassName** virtual feature must be followed by an equals symbol and the qualified name of the *Stereotype* between quotation marks.

```
alias::metaclassName="qualified::name"
```

It is important to note that this qualified name is basically a path and the name that identifies uniquely each *Stereotype*, and each substring is concatenated with a double colon notation.

Using the metaclassName Virtual Feature

The following steps illustrate what you need to do to use the metaclassName virtual feature:

1. The MapleMBSE ecore is imported and its alias is mse.
2. Two data-sources are used for this example with **metaclassName** to filter *Blocks* and *Requirements*. **Note:** both of those SysML concept are UML Classes but with different *Stereotypes*.
3. Defining `synctable-schemas`, one for *Blocks* and another for *Requirements*. **Note:** To avoid problems with MapleMBSE it is a good practice to use the same qualifier and *Stereotype* filter in the `data-source` and the first dimension of the schema.
4. Complete the rest of the configuration as usual: `worksheet-templates`, `synctable` and `workbook`.

Example

The following example showcases how to use `metaClassName` to create *Classes* applying 2 different *Stereotypes*.

```

1 import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2 import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4 data-source Root[Model]
5 data-source blocks = Root/packagedElement[Class | mse::metaClassName="SysML::Blocks::Block"]
6 data-source requirements = Root/packagedElement[Class | mse::metaClassName="SysML::Requirements::Requirement"]
7
8 @synctable-schema BlockSchema {
9   record dim [Class | mse::metaClassName="SysML::Blocks::Block"] {
10     key column /name as bName
11   }
12 }
13
14 @synctable-schema RequirementSchema {
15   record dim [Class | mse::metaClassName="SysML::Requirements::Requirement"] {
16     key column /name as rName
17   }
18 }
19
20 @worksheet-template BlockTemplate (bsc: BlockSchema) {
21   vertical table tabl at (1, 1) = bsc {
22     key field bName: String
23   }
24 }
25
26 @worksheet-template RequirementTemplate(rsc: RequirementSchema) {
27   vertical table tabl at (1, 1) = rsc {
28     key field rName: String
29   }
30 }
31
32 synctable blockTable = BlockSchema<blocks>
33 synctable requirementTable = RequirementSchema<requirements>
34
35 @workbook {
36   worksheet BlockTemplate(blockTable)
37   worksheet RequirementTemplate(requirementTable)
38 }
39

```

Figure 2.1: metaClassName Example

2.2 featureName

Description

As mentioned in the introduction of this section, once you applied a *Stereotype* to any *Element*, you are changing its semantics and extending it. Use `featureName` to access those extended properties stored in *Slots* using their qualified names.

The class diagram in *Figure 2.2* (page 7) shows the different *EClasses* that need to be queried in order to access those *Slots*, remember that *Element* is an abstract *EClass* and it should not be used as the qualifier. Basically all elements in a *Model* implement *Element*, thus *EClasses* like *Class* have the structural feature `appliedStereotypeInstance` to query *InstanceSpecification*.




Figure 2.2: A The appliedStereotypeInstance Structure

Syntax

Use `featureName` the same way `metaclassName` is used within a qualifier as a filter, meaning that no dot or slash notations are needed before the alias. It expected, following the virtual feature, an equal symbol and a string between quotation marks; this string is the qualified name of the property to access.

```
alias::featureName="qualified::name"
```

This qualified name is similar to the one used to identify the *Stereotype* but it differs slightly at the end with extra information concatenated to identify a single extension. As mentioned before this virtual feature is usable while querying a *Slot* inside a *InstanceSpecification* inside an concrete *Element*, but you must also know that this *Element* must be filtered by `metaclassName` with the qualified name that identifies the *Stereotype*.

Using the featureName Virtual Feature

To access extra Properties added after applying a Stereotype:

1. Import the MapleMBSE.ecore.
2. Inside a synctable-schema navigate to a *MultiplicityElement*, in this case, `/ownedAttribute[Property]` within a Class.
3. Within that dimension, define a regular column using `/mse::multiplicityProperty`.
4. Complete the rest of the configuration as usual: worksheet-templates, synctable and workbook.

Example

The following example illustrates how to access extra *Properties* added after applying a *Stereotype*.

1. Import MapleMBSE ecore, for this example use `mse` as the alias.
2. Create a data-source using the `metaClassName` virtual feature mentioned before to filter *Requirements*.
3. Define a synctable-schema for *Requirements*. **Note:** use the same qualifier and *Stereotype* for the first dimension as for the data-source.
4. To access the `SysML::Requirements::Requirement::Text` *Property* added to a *Class* after applying the Requirement *Stereotype* you must:
 1. Navigate *appliedStereotypeInstance* to get an *InstanceSpecification*.
 2. Then *slot* to recover all the *Slots* within the *InstanceSpecification*
 3. Use *featureName* with the *Slot* qualifier to filter the *Property* that you want to access

Note: The qualified name of that *Property* is the name of the qualified *Stereotype* plus 2 colons and the name of the *Property*.

Stereotype: `SysML::Requirements::Requirement`

Property: `SysML::Requirements::Requirement::Text`

4. Complete the rest of the configuration as usual: `worksheet-templates`, `synctable` and `workbook`.

```

1 import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2 import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4 data-source Root[Model]
5 data-source requirements = Root/packagedElement[Class | mse::metaClassName="SysML::Requirements::Requirement"]
6
7
8 synctable-schema RequirementSchema {
9     record dim [Class | mse::metaClassName="SysML::Requirements::Requirement"] {
10         key column /name as rName
11         column /appliedStereotypeInstance[InstanceSpecification]/slot[Slot|mse::featureName=
12             "SysML::Requirements::Requirement::Text"]/value[LiteralString]/value
13             as spec
14     }
15 }
16
17 worksheet-template RequirementTemplate(rsc: RequirementSchema) {
18     vertical table tabl at (1, 1) = rsc {
19         key field rName: String
20         field spec: String
21     }
22 }
23
24 synctable requirementTable = RequirementSchema<requirements>
25
26 workbook {
27     worksheet RequirementTemplate(requirementTable)
28 }
29

```

Figure 2.3: `featureName` Example

2.3 stereotypeNames

Description

Use the **stereotypeNames** virtual feature to filter and create *Model Elements* with the specific combination of *Stereotypes*. To use this virtual feature you need a complete and necessary list of *Stereotypes* and their qualified names, and concatenate those qualified names into a single String. Only *Elements* which *Stereotypes* match in number and in qualified name are accepted by this filtering. The order of those *Stereotypes* is not important.

Syntax

This virtual feature is used as a attribute filter inside the qualifier and it does not require a dot or slash. The **stereotypeNames** virtual feature must be followed by an equal symbol and a String with *Stereotypes*. That String must separate the *Stereotypes* qualified names with a comma to work properly.

```
alias::stereotypeNames="one::qualified::name,another::qualified::name"
```

It is important to know that the order of the qualified names are not important. They can be swapped and the same result is to be expected. On the other hand, the String must include the exact number of *Stereotypes* the filter should use. Meaning if you have a model with N *Elements* with *Stereotypes* A and B, filtering using the String "A;B;C" would not show any of those N *Elements* as they do not have the same number of *Stereotypes*.

Using the stereotypeNames Virtual Feature

The following steps illustrate what you need to use the stereotypeNames virtual feature:

1. The MapleMBSE ecore is imported and its alias is mse.
2. A couple data-sources are used for this example with stereotypeNames to filter *Packages* and *Classes*.
3. To use this feature to apply *Stereotypes*, you need to define a synctable-schema.
Note: To avoid problems with MapleMBSE it is a good practice to use the same qualifier and *Stereotypes* filter in the data-source and the first dimension of the schema.
4. Complete the rest of the configuration as usual: worksheet-templates, synctable and workbook.

Example

The following example showcases how to use `stereotypeNames` to create and filter *Elements* with different *Stereotypes*.

```

1 import-ecore "http://www.nomagic.com/magicdraw/UML/2.5.1"
2 import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4 workbook {
5   worksheet ActivityTable(functionalTableSchema)
6   worksheet FunctionFMEAMatrix(functionalFMEASchema,functionalTableSchema,fMEATableSchema)
7   worksheet FunctionsFMEATable(functionalFMEASchema)
8   worksheet FMEARequirementTable(fMEARequirementSchema)
9   worksheet DerivedFMEARequirementTable(derivedFMEARequirementSchema)
10  worksheet RequirementFMEAMatrix(derivedFMEARequirementSchema, fMEARequirementSchema, fMEATableSchema)
11 }
12
13
14 data-source Root[Model]
15 data-source pkg = Root/packagedElement[Model|name = "Model-UAVSystem"]/packagedElement[Package|name = "System Behavior"]
16 data-source act = pkg/packagedElement[Activity]
17 data-source fmea = pkg/packagedElement[Package|name = "FMEA"]/packagedElement[Class|mse::stereotypeNames="CustomStereotypes::FMEA"]
18 data-source fmeaR = pkg/packagedElement[Package|name = "FMEA"]/packagedElement[Package|name = "FMEARequirement"]
19   /packagedElement[Class|mse::stereotypeNames="CustomStereotypes::FMEARequirement, SysML::Requirements::AbstractRequirement"]
20
21
22 syncTable-schema FunctionalTableSchema{
23   record dim[Activity]{
24     key column /name as actName
25   }
26 }
27
28 syncTable-schema FMEARequirementSchema{
29   record dim[Class|mse::stereotypeNames="CustomStereotypes::FMEARequirement"]{
30     column /name as ReqName
31     key column /appliedStereotypeInstance[InstanceSpecification]
32     /slot[Slot|mse::featureName="SysML::Requirements::AbstractRequirement::Id"]/value[LiteralString]/value as ReqID
33     column /appliedStereotypeInstance[InstanceSpecification]
34     /slot[Slot|mse::featureName="SysML::Requirements::AbstractRequirement::Text"]/value[LiteralString]/value as ReqSpecification
35   }
36 }
37
38 ....
39

```

Figure 2.4: stereotypeNames Example


3 Associations

An *Association* between two *Blocks* creates cross references for two UML *Classes* with SysML *Block Stereotypes* (<<block>>) to one *Association* using two properties and also makes some cross references, like *Type* and *Association*, within those properties .

3.1 associatedProperty

Description

In MagicDraw, with a couple clicks from one block to another, all of these elements are correctly created. Similarly in MapleMBSE, the `associatedProperty` virtual feature provides the ability to connect two SysML *Blocks*, creating a bidirectional *Association* at the same hierarchical level in the diagram as the source *Block*.

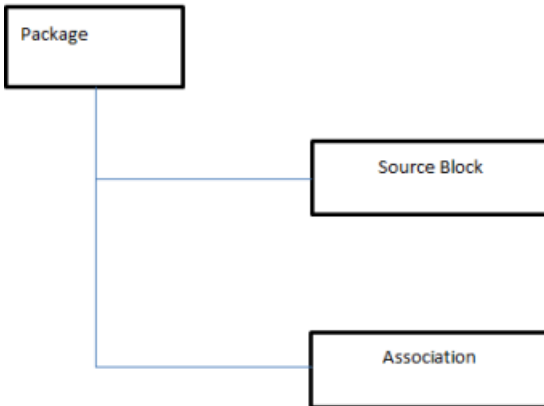

When MapleMBSE queries the model, the `associatedProperty` returns the target *Block* (the *Block* that is related to a *Property* through an *Association*).

Syntax

The general syntax for using the `associatedProperty` virtual feature is as follows:

```
.alias::associatedProperty
```

Where `alias` is the alias you assigned to the MapleMBSE ecore. For more information on assigning aliases, see *Importing the MapleMBSE Ecore (page 3)*.

The `associatedProperty` virtual feature must be used when querying the *Property* of a *Block*.

Using the `associatedProperty` Virtual Feature

The following example illustrates what you need to do to use `AssociatedProperty` virtual feature.

1. In line two, the `maplembse core` is imported with an alias.
2. Use an `ownedAttribute[Property]` as the queried dimension.
3. Make a reference-query to a class using `mse::associatedProperty`.
4. Complete the `reference-decomposition`.

Example

```

1 import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2 import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4 data-source Root[Model]
5 data-source structurePkg = Root/ packagedElement[Package]
6 data-source clss = structurePkg/ packagedElement[Class]
7
8 synctable-schema ClassTableSchema {
9   dim [Class] {
10     key column /name as ClassName
11   }
12 }
13
14 synctable-schema ClassTreeTableSchema(blocks: ClassTableSchema) {
15   record dim [Class] {
16     key column /name as className1
17   }
18   dim /ownedAttribute[Property].mse::associatedProperty[Class] @ cls {
19     reference-decomposition cls = cts {
20       foreign-key column ClassName as referredClassName
21     }
22   }
23 }
24
25 synctable classTableSchema = ClassTableSchema<clss>
26 synctable classTreeTableSchema = ClassTreeTableSchema<clss>(classTableSchema)
27
28 worksheet-template ClassTable(cts: ClassTableSchema) {
29   vertical table tab1 at (6, 2) = cts {
30     key field ClassName : String
31     key field Name4 : String
32   }
33 }
34
35 worksheet-template ClassTreeTable(ctt: ClassTreeTableSchema) {
36   vertical table tab1 at (6, 2) = ctt {
37     key field ClassName1 : String
38     key field referredClassName : String
39   }
40 }
41
42 workbook{
43   worksheet ClassTable(classTableSchema)
44   worksheet ClassTreeTable(classTreeTableSchema)
45 }

```

Figure 3.1: associatedProperty Example

3.2 directedAssociatedProperty

Description

To create *Associations* with navigability in one direction MapleMBSE uses *directedAssociatedProperty*, using this virtual feature links two *Classes* and adds a *Property* to the source *Block* and other *Property* to an *Association*.

Based on the *aggregation* value we can use this virtual feature to create *Association*, *Aggregation* and *Composition* with direction.

Syntax

The general syntax for using the `directedAssociatedProperty` virtual feature is as follows:

```
.alias::directedAssociatedProperty
```

Where `alias` is the alias you assigned to the MapleMBSE ecore (hyperlink to above).

The `directedAssociatedProperty` virtual feature must be used when querying the *Property* of a *Block*.

Using the directAssociatedProperty Virtual Feature

The following example illustrates what you need to do to use `directedAssociatedProperty`.

1. In line two, the **maplembse ecore** is imported with an alias.
2. Use an `ownedAttribute[Property]` as the queried dimension.
3. Make a reference-query to a class using `mse::directedAssociatedProperty`.
4. Complete the `reference-decomposition`.

Example

```

1 import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2 import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4 data-source Root[Model]
5 data-source structurePkg = Root/packagedElement[Package]
6 data-source clss = structurePkg/packagedElement[Class]
7
8Ⓣ synctable-schema ClassTableSchema {
9Ⓣ   dim [Class] {
10      key column /name as ClassName
11   }
12 }
13
14Ⓣ synctable-schema ClassTreeTableSchema(blocks: ClassTableSchema) {
15Ⓣ   record dim [Class] {
16      key column /name as className1
17   }
18Ⓣ   dim /ownedAttribute[Property].mse::directedAssociatedProperty[Class] @ cls {
19Ⓣ     reference-decomposition cls = cts {
20       foreign-key column ClassName as referredClassName
21     }
22   }
23 }
24
25 synctable classTableSchema = ClassTableSchema<clss>
26 synctable classTreeTableSchema = ClassTreeTableSchema<clss>(classTableSchema)
27
28Ⓣ worksheet-template ClassTable(cts: ClassTableSchema) {
29Ⓣ   vertical table tab1 at (6, 2) = cts {
30     key field ClassName : String
31     key field Name4 : String
32   }
33 }
34
35Ⓣ worksheet-template ClassTreeTable(ctt: ClassTreeTableSchema) {
36Ⓣ   vertical table tab1 at (6, 2) = ctt {
37     key field ClassName1 : String
38     key field referredClassName : String
39   }
40 }
41
42Ⓣ workbook{
43   worksheet ClassTable(classTableSchema)
44   worksheet ClassTreeTable(classTreeTableSchema)

```

Figure 3.2: directAssociatedProperty Example

3.3 otherAssociatedEnd

Description

otherAssociationEnd is used in the case when two classifiers has to be linked and the information about the properties of these classifiers are owned by the association and not the classifiers themselves, such as in the case of UseCase diagram where association exist between an actor and usecase and these two classifiers does not own any property that defines the other classifier.

Syntax

The general syntax for using the otherAssociationEnd virtual feature is as follows:

```
.alias::otherAssociationEnd
```

Where `alias` is the alias you assigned to the `MapleMBSE ecore` ([hyperlink to above](#)).

The otherAssociationEnd virtual feature must always be used when querying a Class

.

Using the otherAssociatedEnd Virtual Feature

The following example illustrates what you need to do to use otherAssociationEnd.

1. In line two, the `maplembse ecore` is imported with an alias.
2. Use when a `Class` as the queried dimension.
3. Make a reference-query to a class using `mse::otherAssociationEnd`, unlike other virtual features in this section otherAssociationEnd should not be used when a property is queried.
4. Complete the `reference-decomposition`.

Example


```

1  import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2  import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4  data-source Root[Model]
5  data-source useCasePkg = Root/packageElement[Package]
6  data-source actors = useCasePkg/packageElement[Actor]
7  data-source useCases = useCasePkg/packageElement[UseCase]
8
9  synctable-schema ActorsTable {
10     record dim [Actor] {
11         key column /name as Actor
12     }
13 }
14
15 synctable-schema UseCasesTable(ac:ActorsTable) {
16     record dim [UseCase] {
17         key column /name as Name
18         reference-query .mse::otherAssociationEnd[Actor] @ actor
19         reference-decomposition actor = ac {
20             foreign-key column Actor as Actor
21         }
22     }
23 }
24
25
26 synctable actorsTable = ActorsTable<actors>
27 synctable useCasesTable = UseCasesTable<useCases>(actorsTable)
28
29 worksheet-template Actors(ac: ActorsTable) {
30     vertical table tab1 at (5, 3) = ac {
31         key field Actor : String
32     }
33 }
34
35 worksheet-template UseCases(auct: AssociatedUseCasesTable) {
36     vertical table tab1 at (5, 3) = auct {
37         key field Name : String
38         key field Actor : String
39     }
40 }
41
42 workbook {
43     worksheet Actors(actorsTable)
44     worksheet UseCases(useCasesTable)
45 }

```

Figure 3.3: otherAssociatedEnd Example

4 Connectors

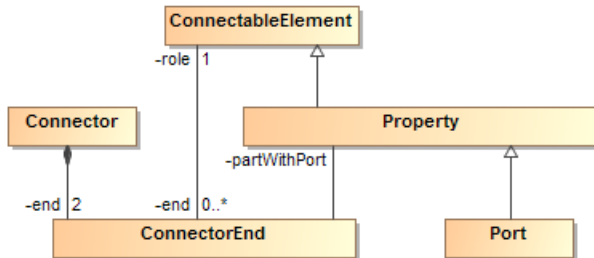

A *Connector* is used to link *ConnectableElements* (for example, *Ports* or *Properties*) of a *Class* through a *ConnectorEnd*. A *Connector* has two *ConnectorEnds*.

Based on the connection between *Properties* of a *Class* the connection can be of two types: *Delegation* (connecting *Ports* or *Properties* from the system to *Ports* or *Properties* inside a *Class*) or *Assembly* (connecting *Ports* or *Properties* within a *Class*).

4.1 connectedPropertyOrPort

Description

To achieve this connection MapleMBSE uses `connectedPropertyOrPort` virtual feature.

The `connectorPropertyOrPort` virtual feature connects *Ports* or *Properties* of a *Class*. It automatically detects the kind of relation required between the *Properties* being connected and creates the appropriate connection.

When MapleMBSE queries the model, the `connectedPropertyOrPort` return the list of target properties.

Syntax

The general syntax for using the `connectedPropertyOrPort` virtual feature is as follows:

```
.alias::connectedPropertyOrPort
```

Where the `alias` is alias you assigned to MapleMBSE ecore.

When the connection is created through `connectedPropertyOrPort`, the owner of the connected *Property* is determined automatically by MapleMBSE, regardless of whether this is a *Delegation* or *Assembly* type connection.

Using the `connectedPropertyOrPort` virtual feature

In general, to use the `connectedPropertyOrPort` virtual feature:

1. First, import the MapleMBSE.ecore with `alias`
2. Use an `ownedAttribute[Property]` as the queried dimension.
3. Make a reference-query to a property using `mse::connectedPropertyOrPort`.
4. Complete the `reference-decomposition`.

Example

A specific example of how to use the `ConnectedPropertyOrPort` virtual feature is shown below.

```

1  import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2  import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4  synctable-schema BlocksTable {
5      record dim [Class|mse::metaclassName="SysML::Blocks::Block"] {
6          key column /name as BlockName
7      }
8      dim /ownedAttribute[Property] {
9          key column /name as PropertyName
10     }
11 }
12 synctable-schema ConnectedPropertyOrPortTable(bT: BlocksTable) {
13     record dim [Class|mse::metaclassName="SysML::Blocks::Block"] {
14         key column /name as className
15     }
16     record dim /ownedAttribute[Property] {
17         key column /name as ParentPort
18     }
19     record dim .mse::connectedPropertyOrPort @ cls {
20         reference-decomposition cls = bT {
21             foreign-key column BlockName as referredClassName
22             foreign-key column PortName as referredPortName
23         }
24     }
25 }

```

Figure 4.1: `connectedPropertyOrPort` Example

4.2 otherConnectorEnd

Description

To achieve this connection MapleMBSE also use `otherConnectorEnd` virtual feature. This virtual feature can connect between ports or properties of a class, `otherConnectorEnd` automatically create the relation required between the properties being connected and creates appropriate connection.

When MapleMBSE queries the model, the `otherConnectorEnd` return the list of connectorEnds which is associated with the property.

Syntax

The general syntax for using the `otherConnectorEnd` virtual feature is as follows:

```
.alias::otherConnectorEnd
```

Where the `alias` is the alias you assigned to the MapleMBSE ecore.

When the connection is created using `otherConnectorEnd`, the owner of the connected *Property* is determined automatically by MapleMBSE, regardless of whether this is a *Delegation* or *Assembly* type connection.

Using the otherConnectorEnd Virtual Feature

How to use the `otherConnectorEnd` virtual feature is shown in the example below:

1. First, import the MapleMBSE ecore with an appropriate alias
2. Use an `ownedAttribute[Property]` as the queried dimension.
3. Make a reference-query to a property using `mse::otherConnectorEnd`.
4. Complete the `reference-decomposition`.

Example

A specific example of how to use the `otherConnectorEnd` virtual feature is shown below.

```

1 import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2 import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3 synctable-schema BlocksTable {
4     record dim [Class|mse::metaclassName="SysML::Blocks::Block"] {
5         key column /name as blockName
6     }
7     dim /ownedAttribute[Property] {
8         key column /name as propertyName
9     }
10 }
11 synctable-schema OtherConenctorEndTable(bt:BlocksTable){
12     record dim [Class|mse::metaclassName="SysML::Blocks::Block"]{
13         key column /name as ownerBlockName
14     }
15
16     record dim /ownedAttribute[Property]{
17         key column /name as pname
18     }
19     record dim .mse::otherConnectorEnd[ConnectorEnd] {
20         key reference-query .role @ cls
21         reference-decomposition cls = bt {
22             foreign-key column BlockName as refRoleBlock
23             foreign-key column PropertyName as refportName
24         }
25         reference-query .partWithPort @ pwp
26         reference-decomposition pwp = bt {
27             foreign-key column BlockName as refPropertyBlock
28             foreign-key column PropertyName as refPropertName
29         }
30     }
31 }

```

Figure 4.2: otherConnectorEnd Example

5 Dependencies

A *Dependency* is used between two model elements to represent a relationship where a change in one element (the supplier element) results in a change to the other element (client element).

A *Dependency* relation can be created between any *namedElement*. Different kinds of *Dependencies* can be created between the model elements such as *Refine*, *Realization*, *Trace*, *Abstraction* etc.,

5.1 clientDependencies

Description

The `clientDependencies` virtual feature creates a relation between the client being the dependent and supplier who provides further definition for the dependent.

Syntax

The general syntax for using the `clientDependencies` virtual feature is as follows:

```
/mse::clientDependencies
```

This virtual feature is used while querying a Class that has to be assigned as client to the dependency that is being created and is used in a following dimension the class that is being queried.

Where `alias` is the alias you assigned to the MapleMBSE ecore.

Using the clientDependencies Virtual Feature

In general, the following steps outline how to use `clientDependencies`:

1. It should be used when a named element is queried
2. Information about the type of relationship is specified as `[Dependency]`, `[Abstraction]` etc.,
3. When querying the model element with `mse::clientDependencies`, the reference decomposition should be to a supplier element.

Example

The example below is an illustration of how to use the `clientDependencies` virtual feature.

```

1  import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2  import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4  data-source Root[Model]
5  data-source package = Root/packagedElement[Package]name="Package"]
6  data-source act = package/packagedElement[Activity]
7  data-source cls = package/packagedElement[Class]
8
9  synctable-schema ActivityTableSchema {
10     record dim [Activity] {
11         key column /name as ActName
12     }
13 }
14
15 synctable-schema ClassAbstractionTableSchema(acts:ActivityTable) {
16     record dim [Class] {
17         key column /name as ActName1
18     }
19     record dim /mse::clientDependencies[Dependency] {
20         key reference-query .supplier @ refDecomp
21         reference-decomposition refDecomp = reqs {
22             foreign-key column ActName as AbsName
23         }
24     }
25 }
26
27 synctable activityTableSchema = ActivityTableSchema<act>
28 synctable classAbstractionTableSchema = ClassAbstractionTableSchema<cls>(ActivityTable)
29
30 worksheet-template ActivityTable(cts:ActivityTableSchema){
31     vertical table tab1 at (4,5) = cts{
32         key field ActName : String
33     }
34 }
35
36 worksheet-template ClassAbstractionTable(cds:ClassAbstractionTableSchema){
37     vertical table tab1 at (4,5) = cds{
38         key field ActName1 : String
39         key field AbsName : String
40     }
41 }
42 workbook{
43     worksheet ActivitiesTable(ActivityTable)
44     worksheet ClassAbstractionTable(classAbstractionTableSchema)
45 }
46

```

Figure 5.1: clientDependencies Example

5.2 supplierDependencies

Description

Similar to `clientDependencies`, `supplierDependencies` is used to create a relation between two named elements. The only difference between the two virtual features is `supplierDependencies` is used when the relationship has to be made from supplier to client instead of client to supplier, as in the case of `clientDependencies`.

Syntax

The general syntax for using the `supplierDependencies` virtual feature is as follows:

```
/mse::supplierDependencies
```

This virtual feature is used while querying a Class that has to be assigned as supplier to the dependency that is being created and is used in a dimension following the class that is being queried.

Where `alias` is the alias you assigned to the MapleMBSE core.

Using the supplierDependencies Virtual Feature

The following example illustrates what you need to do to use `supplierDependencies`

1. It should be used when a named element is being queried.
2. Information about the type of relationship is specified as `[Dependency]`, `[Abstraction]` etc.,
3. When querying the model element with `mse::supplierDependencies` the reference decomposition should be to a client element.

Example

```

1 import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2 import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4 data-source Root[Model]
5 data-source package = Root/packagedElement[Package|name="Package"]
6 data-source cls = package/packagedElement[Class|mse::metaClassName="SysML::Requirements::Requirement"]
7
8 synctable-schema RequirementsTableSchema {
9   record dim [Class|mse::metaClassName="SysML::Requirements::Requirement"] {
10     key column /name as ReqName
11   }
12 }
13
14 synctable-schema RequirementsDerivesTableSchema(reqs:RequirementsTable) {
15   record dim [Class|mse::metaClassName="SysML::Requirements::Requirement"] {
16     key column /name as ReqName1
17   }
18   record dim /mse::supplierDependencies[Abstraction|mse::metaClassName="SysML::Requirements::DeriveReq"] {
19     key reference-query .client @ reqDecomp
20     reference-decomposition reqDecomp = reqs {
21       foreign-key column ReqName as DeriveName
22     }
23   }
24 }
25
26 synctable requirementsTableSchema = RequirementsTableSchema<cls>
27 synctable requirementsDerivesTableSchema = RequirementsDerivesTableSchema<cls>(requirementsTable)
28
29 worksheet-template ReqClassTable(cts:RequirementsTableSchema){
30   vertical table tab1 at (4,5) = cts{
31     key field Name : String
32   }
33 }
34
35 worksheet-template ReqClassDependency(cds:RequirementsDerivesTableSchema){
36   vertical table tab1 at (4,5) = cds{
37     key field Name1 : String
38     key field DeriveName : String
39   }
40 }
41
42 workbook{
43   worksheet ReqClassTable(requirementsTableSchema)
44   worksheet ReqClassDependency(requirementsDerivesTableSchema)
45 }

```

Figure 5.2: supplierDependencies Example

6 Enumeration

Enumeration is a special *Data Type* that can be compared to a list of possible values, the way that "colors" can be an enumeration and possible values can be: red, blue, green, etc. These *Enumerations* are composed of *Enumeration Literals* which are the different values and the actual *Elements* to be referenced. MapleMBSE supports a couple virtual features that need to be used in conjunction to access and reference any *Enumeration* and its *Enumeration Literals* independently of where in the TWCloud project those values are stored (for example, under *Model* or customized profile)

6.1 EnumerationName

Description

MapleMBSE, to simplify *Enumeration* identification, supports an `enumerationName` virtual feature that allows simpler access to a specific *Enumeration* while creating an MSE configuration. Note that MapleMBSE, while using this virtual feature, will by default instantiate the accessed *Element* to the first *Enumeration Literal* of the *Enumeration*. Nonetheless, `enumerationLabel` can be used to change to another *Enumeration Literal*. See the next section for further details.

Syntax

The general syntax for using the `enumerationName` virtual feature is as follows:

```
alias::enumerationName="qualified::name"
```

Where `alias` is the alias you assigned to the MapleMBSE ecore and `qualified::name` is the `qualifiedName` of the *Enumeration*. For more information on assigning aliases, see *Importing the MapleMBSE Ecore (page 3)*.

The `enumerationName` virtual feature must be used while querying an *Element* with a *Stereotype* that supports some *Property* with an *Enumeration type*. For more information on how to access a *Slot*, see the sections in the guide on the `metaclassName` and `featureName` virtualFeatures. Once you get the specific *Slot*, retrieve its *value* and within its *Qualifier* filter use `enumerationName`.

Using the VertexTransition Virtual Feature

The following example illustrates what you need to do to use the `enumerationName` virtual feature:

1. Import the `maplembse` ecore with an alias.
2. Create a schema that takes an *Element* with a *Stereotype* and navigate down to its *InstanceValue* for a *Property* with an *Enumeration type*. See lines 15 to 18 in the example code in the next section for an illustration.

3. Make sure you are using the right combination of qualified names for Stereotypes, Slot Properties and Enumeration.
4. Complete the /value[InstanceValue] navigation with an enumerationLabel (see next section for further details).

Example

```

1 import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2 import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4 @workbook {
5     worksheet EnumerationTemplate(enums)
6 }
7
8 data-source Root[Model]
9 @data-source reqs = Root/packagedElement[Package|name="Enum"]
10 /packagedElement[Class|mse::metaClassName="SysML::Non-Normative Extensions::Requirement::extendedRequirement"]
11
12 @synctable-schema EnumSchema {
13     dim [Class|mse::metaClassName="SysML::Non-Normative Extensions::Requirement::extendedRequirement"] {
14         key column /name as rName
15         column /appliedStereotypeInstance[InstanceSpecification]
16             /slot[Slot|mse::featureName="SysML::Non-Normative Extensions::Requirement::extendedRequirement::verifyMethod"]
17             /value[InstanceValue|mse::enumerationName="SysML::Non-Normative Extensions::Requirement::VerificationMethodKind"]
18             /mse::enumerationLabel as verificationMethod
19     }
20 }
21
22 synctable enums = EnumSchema<reqs>
23
24 @worksheet-template EnumerationTemplate (es: EnumSchema) {
25     vertical table tab1 at (1, 1) = es {
26         key field rName
27         field verificationMethod
28     }
29 }

```

6.2 EnumerationLabel

Description

As shown in the previous sections on EnumerationName, MapleMBSE allows you to make a reference to Enumeration using a qualifiedName. However, without the right mechanism to translate from String to EnumerationLiterals and vice versa, the end user will be forced to deal with strange Object references or unusable Excel cells. This is exactly the problem enumerationLabel was designed to solve. Using this virtual feature allows the end user to see the String name of the EnumerationLiteral without forcing any reference-decomposition and it allows also the end user to change the reference from the Slot Property using the String name of the desired EnumerationLiteral

Syntax

The general syntax for using the enumerationLabel virtual feature is as follows:

```
/alias::enumerationLabel
```

Where alias is the alias you assigned to the MapleMBSE ecore. For more information on assigning aliases, see *Importing the MapleMBSE Ecore (page 3)*.

The enumerationLabel virtual feature must be used while querying an InstanceValue with a Stereotype that supports some Property with a Enumeration type and which was

filtered with `enumerationName`. For more information how to access this kind of *InstanceValue*, see the previous section.

7 Util

This section contains all other virtual features that do not create elements but offer a better alternative to access and map model information.

7.1 multiplicityProperty

Description

The UML specification contains several *MultiplicityElements* like *Properties* that have *upper* and *lower* features to describe their multiplicity. Use the **multiplicityProperty** virtual feature to make a configuration that translates a string into those *upper* and *lower* values and the other way around.

This virtual feature recognizes the UML commonly used notation for multiplicity (e.g. 0..*). Supporting this notation makes MapleMBSE much easier to use without adding complexity and thus the final user has less to input into Excel.

Syntax

The general syntax for using the `multiplicityProperty` virtual feature is as follows:

```
/alias::multiplicityProperty
```

Where the `alias` is the alias you assigned to the MapleMBSE ecore.

This virtual feature can only be used while querying a concrete *EClass* implementing a *MultiplicityElement* like a *Property* or a *Pin*. A slash notation is needed prior to the alias, the 2 colons, and **multiplicityProperty**.

As mention previously `multiplicityProperty` uses a string to represent the multiplicity, meaning that this particular virtual feature cannot being used as a dimension with a qualifier. It is intended to be used only at a column declaration.

Using the multiplicityProperty Virtual Feature

The following example shows you how to map the multiplicity of a concrete *MultiplicityElement* like *Property* and a string.

1. Import the MapleMBSE ecore, as usual the alias used is `mse`
2. Inside a syntable-schema navigate to a *MultiplicityElement*, in this case `/ownedAttribute[Property]` within a *Class*
3. Within that dimension, define a regular column using `/mse::multiplicityProperty`

4. Complete the rest of the configuration as usual: worksheet-templates, synctable and workbook

Example

```
1 import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2 import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4 data-source Root[Model]
5 data-source classes = Root/packagedElement[Class]
6
7 synctable-schema Schema {
8     record dim [Class] {
9         key column /name as cName
10    }
11
12    record dim /ownedAttribute[Property] {
13        key column /name as pName
14        column /mse::multiplicityProperty as multiplicity
15    }
16 }
17
18 worksheet-template Template(sch: Schema) {
19     vertical table tab1 at (2, 2) = sch {
20         key field cName : String
21         key field pName : String
22         field multiplicity : String
23         sort-keys cName, pName
24     }
25 }
26
27 synctable tableProperty = Schema<classes>
28
29 workbook {
30     worksheet Template(tableProperty)
31 }
```

Figure 7.1: multiplicityProperty Example

8 Activity Diagrams

An Activity Diagram is a diagram with a direct connection, `ActivityEdge`, that connects a node, `ActivityNode`, to another `ActivityNode`. An Activity Diagram is useful to abstract behavioral information within a system. In order to improve MSE configurations, `MapleMBSE` supports control and object flow, the 2 kind of `ActivityEdges`, with two distinct virtual features.

8.1 ActivityControlFlow

Description

A *ControlFlow* is an *ActivityEdge* that is used to control the execution of *ActivityNodes* within an *Activity*.

In `MapleMBSE`, the virtual feature `ActivityNode` is used as a reference to create `ControlFlows`. Note that in `MapleMBSE`, abstract classes such as `ActivityNode` cannot be instantiated. Thus, you must instantiate concrete classes such as `CallActionBehavior`, `ActivityParameterNode`, or `InitialNode`. See the example section for further details.

Syntax

The general syntax for using the `activityControlFlow` virtual feature is as follows:

```
.alias::activityControlFlow
```

Where `alias` is the alias you assigned to the `MapleMBSE` ecore. For more information on assigning aliases, see *Importing the MapleMBSE Ecore (page 3)*.

The `activityControlFlow` virtual feature must be used when querying the *ActivityNode* of *Activity*.

Using the ActivityControlFlow Virtual Feature

The following example illustrates what you need to do to use `activityControlFlow` virtual feature:

1. Import the **maplembse ecore** with an alias.
2. Create a schema that navigates until an *ActivityNode* or an element that has an *ActivityNode* as its first dimension
3. Make a dimension `reference-query` to another *ActivityNode* using `.mse::activityControlFlow`.
4. Complete the `reference-decomposition`.

This example has extra schema, `CallBehaviorActionSchema` used to create concrete *ActivityNodes*. The other schemas in this example will fail to instantiate *Element* because

ActivityNode is an abstract class.

Note: Some data sources specific to a fictional project were created to simplify the `reference-decomposition`. In a real life scenario you might need to identify the *Package*, the *Activity* and the *ActivityNode* that you want to connect to.

Example

```

1  import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2  import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4  data-source Root[Model]
5  data-source pkg = Root/packagedElement[Package|name = "controlflow"]
6  data-source activities = pkg/packagedElement[Activity|name="activity"]
7  data-source nodes = activities/node[ActivityNode]
8  data-source cba = activities/node[CallBehaviorAction]
9
10 synctable-schema NodeSchema {
11     dim [ActivityNode] {
12         key column /name as nName
13     }
14 }
15
16 synctable-schema CallBehaviorActionSchema {
17     dim [CallBehaviorAction] {
18         key column /name as nName
19     }
20 }
21
22 worksheet-template CallBehaviorActionTemplate (cbasc: CallBehaviorActionSchema) {
23     vertical table tab1 at (2, 1) = cbasc {
24         key field nName
25     }
26 }
27
28 synctable-schema Schema(nsc: NodeSchema) {
29     dim [ActivityNode] {
30         key column /name as nName
31     }
32
33     dim .mse::activityControlFlow[ActivityNode] @ tgtNode {
34         reference-decomposition tgtNode = nsc {
35             foreign-key column nName as tgtNode
36         }
37     }
38 }

```

Figure 8.1: ActivityControlFlow Example

8.2 ActivityObjectFlow

Description

An *ObjectFlow* is an *ActivityEdge* that represents the flow of object data between *ActivityNodes* within an *Activity*. Sometimes, the *ObjectFlow* directly connects two *ActivityNodes*. However, due to UML specifications, some *ActivityNodes* cannot be connected directly using an *ObjectFlow*. In these cases *Pins* are required. *Pins* are objects that accept and provide values to actions. These values represent an input to an action or output from an action.

If an *ActivityNode* that requires *Pins*, such as *CallBehaviorAction*, also has a *Behavior* that further describes its functionality, then both the *ActivityNode* and *Behavior* need to have their *Pins* (specifically *ActivityParameterNode* and *Parameters*) synchronized, both in quantity and direction.

Syntax

The general syntax for using the `activityObjectFlow` virtual feature is as follows:
`.alias:: activityObjectFlow`

Where `alias` is the alias you assigned to the MapleMBSE `ecore`. For more information on assigning aliases, see *Introduction (page 1)*.

The `activityObjectFlow` virtual feature must be used when querying the *ActivityNode* of *Activity*.

Using the ActivityObjectFlow Virtual Feature

The following example illustrates what you need to do to use `activityObjectFlow` virtual feature:

1. Import the **maplembse ecore** with an alias.
2. Create a schema that navigates until an *ActivityNode* or an element which has an *ActivityNode* as its dimension.
3. Make a dimension reference-query to another *ActivityNode* using `.mse:: activityObjectFlow`.
4. Complete the reference-decomposition.

Example

```

1 import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2 import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4 data-source Root[Model]
5 data-source pkg = Root/packagedElement[Package|name = "objectflow"]
6 data-source activities = pkg/packagedElement[Activity|name="activity"]
7 data-source nodes = activities/node[ActivityNode]
8
9⊖ synctable-schema NodeSchema {
10⊖   dim [ActivityNode] {
11     key column /name as nName
12   }
13 }
14
15⊖ synctable-schema Schema(nsc: NodeSchema) {
16⊖   dim [ActivityNode] {
17     key column /name as nName
18   }
19
20⊖   dim .mse::activityObjectFlow[ActivityNode] @ tgtNode {
21⊖     reference-decomposition tgtNode = nsc {
22       foreign-key column nName as tgtNode
23     }
24   }
25 }
26
27⊖ worksheet-template Template (sc: Schema) {
28⊖   vertical table tab1 at (2, 1) = sc {
29     key field nName
30     key field tgtNode
31   }
32 }
33
34 synctable nodeTable = NodeSchema<nodes>
35 synctable controlFlowTable = Schema<nodes>(nodeTable)
36
37⊖ workbook {
38   worksheet Template(controlFlowTable)
39 }

```

Figure 8.2: ActivityObjectFlow Example

9 StateMachines

StateMachine diagrams are used to define the different states that a system will exist in. This kind of diagram helps modelers to describe discrete, event-driven behaviors of the whole system or its parts.

9.1 VertexTransition

Description

MapleMBSE, in order to simplify *Transition* between *Vertexes*, supports a `vertexTransition` virtual feature that allows a better end user experience while inputting data. Note that MapleMBSE will fail to instantiate abstract classes like *Vertex* and it will be required to instantiate instead concrete classes like *Pseudostate*, *State* or *FinalState*. Nonetheless, *Vertex* can be used as reference to create *Transitions*. See the example section for further details.

Syntax

The general syntax for using the `vertexTransition` virtual feature is as follows:

```
.alias:: vertexTransition
```

Where `alias` is the alias you assigned to the MapleMBSE ecore. For more information on assigning aliases, see *Importing the MapleMBSE Ecore (page 3)*.

The `vertexTransition` virtual feature must be used when querying the any kind of *Vertex* within a given *Region* of a *StateMachine*.

Using the VertexTransition Virtual Feature

The following example illustrates what you need to do to use the `vertexTransition` virtual feature:

1. Import the `maplembse` ecore with an alias.
2. Create an schema that navigates till an *Vertex* or which first dimension is an *Vertex*.
3. Make a dimension reference-query to another *Vertex* using `.mse:: vertexTransition`.
4. Complete the reference-decomposition.

This example has some extra schema, called *StateSchema*, used to create concrete *States*. The other schemas in this example will fail to instantiate *Element* because *Vertex* is an abstract class.

Note: some data sources specific to a fictional project were create in order to simplify the `reference-decomposition`, in a real life scenario you might need to identify the *Package*, the *StateMachine*, the *Region* and the *Vertex* that you want to connect to.

Example

```

1 import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2 import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4 data-source Root[Model]
5 data-source pkg = Root/packagedElement[Package|name="statemachine"]
6 data-source stm = pkg/packagedElement[StateMachine|name="stm"]
7 data-source rg = stm/region[Region|name="rg"]
8 data-source vertexes = rg/subvertex[Vertex]
9 data-source states = rg/subvertex[State]
10
11 synctable-schema VertexSchema {
12   dim [Vertex] {
13     key column /name as vName
14   }
15 }
16
17 synctable-schema StateSchema {
18   dim [State] {
19     key column /name as sName
20   }
21 }
22
23 worksheet-template StateTemplate(ssc: StateSchema) {
24   vertical table tab1 at (2, 1) = ssc {
25     key field sName
26   }
27 }
28
29 synctable-schema Schema(vsc: VertexSchema) {
30   dim [Vertex] {
31     key column /name as vName
32   }
33
34   dim .mse::vertexTransition[Vertex] @ tgtRef {
35     reference-decomposition tgtRef = vsc {
36       foreign-key column vName as tgtVertex
37     }
38   }
39 }
40
41 worksheet-template Template(sc: Schema) {
42   vertical table tab1 at (2, 1) = sc {
43     key field vName
44     key field tgtVertex
45   }
46 }
47
48 synctable vertexTable = VertexSchema<vertexes>
49 synctable stateTable = StateSchema<states>
50 synctable transitionTable = Schema<vertexes>(vertexTable)
51
52 workbook {
53   worksheet StateTemplate(stateTable)
54   worksheet Template(transitionTable)
55 }

```

Figure 9.1: VertexTransition Example

10 Comments

10.1 ownedComments

Description

A comment is an element that represents a textual annotation that can be attached to other elements or a set of elements.

A comment can be owned by any element.

This virtual feature creates a comment and annotated it with the owner element.

Syntax

The general syntax for using the ownedComments virtual feature is as follows:

```
/alias:: ownedComments
```

Where the alias is the alias you assigned to the MapleMBSE ecore.

Using the ownedComments Virtual Feature

The following example shows you how to use the ownedComments feature.

1. Import the MapleMBSE ecore, as usual the alias used is `mse`
2. Inside a syntable-schema navigate to a *Class*
3. Within that dimension, define a regular column using `/mse::ownedComments [Comment]`
4. Complete the rest of the configuration as usual: `worksheet-templates`, `synctable` and `workbook`

Example

```
1 import-ecore "http://www.nomagic.com/magicdraw/UML/2.5"
2 import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse
3
4 data-source Root[Model]
5 data-source blocks = Root/packagedElement[Package]
6
7 synctable-schema Schema {
8     record dim [Package] {
9         | key column /name as packageName
10    }
11
12     record dim /packagedElement[Class] {
13         | key column /name as className
14         | column /mse::ownedComments[Comment]/body as body
15    }
16 }
17
18 worksheet-template Template(ts: Schema) {
19     vertical table t at (1,1) = ts {
20         | key field packageName
21         | field className
22         | field body :String
23         | sort-keys packageName
24     }
25 }
26
27 synctable-schema Schema2 {
28     record dim [Package] {
29         | key column /name as packageName
30    }
31
32     record dim /packagedElement[Class] {
33         | key column /name as className
34    }
35
36     record dim /mse::ownedComments[Comment] {
37         | key column /body as body
38    }
39 }
40
41 worksheet-template Template2(ts: Schema2) {
42     vertical table t at (1,1) = ts {
43         | key field packageName
44         | field className
45         | field body :String
46         | sort-keys packageName
47     }
48 }
49
50 synctable Table1 = Schema<blocks>
51 synctable Table2 = Schema2<blocks>
52
53 workbook {
54     worksheet Template(Table1)
55     worksheet Template2(Table2)
56 }
```


11 Slots

SysML permits users to create an instance of the classifiers with their properties. If the classifier is defined with some properties, the instances will own slots that contain the properties defined. This instance allows users to create concrete elements from the more general model. In order to simplify the task related to InstanceSpecification, MapleMBSE proposes the following virtual features to support the creation, edition, and removal of instances and their Slots.

11.1 SlotValue

Description

SysML has a complex structure to access the values within Slots. Those values change widely depending on the type of the property defining the owing Slot. Imagine a real property defining Slot, which, in order to contain that value, requires a LiteralReal, and then the real value will be stored within that literal. Each type has its own literal class, and for reference to other instances the mechanisms are another matter altogether. This is just a reminder of how much complexity this InstanceSpecification modeling has, but thanks to this virtual feature, MapleMBSE simplifies and hides that complexity. Using a single access point and without caring about the concrete type of the property, SlotValue will return a string representing the value given Slot. MapleMBSE proposes an easy mechanism to display, create, and edit that first value associated to any Slot. Emphasis in first, SysML metamodel allows to associate several values to a single Slot, it is by design that MapleMBSE does not use this virtual feature for a different multiplicity.

Syntax

The general syntax for using the slotValue virtual feature is as follows:

```
column [Slot]/alias::slotValue as column_name
```

Where alias is the alias you assigned to the MapleMBSE ecore. For more information on assigning aliases, see *Importing the MapleMBSE Ecore (page 3)*.

The slotValue virtual feature must be used while querying a Slot, and the return string can only be used within a column.

Using the SlotValue Virtual Feature

The following example illustrates what you need to do to use the slotValue virtual feature:

1. Import the MapleMBSE ecore with an alias
2. Create a schema that has a dimension accessing a Slot from an InstanceSpecification, see line 24.
3. Make sure that you are using the right combination of applied Classifier to the InstanceSpecification and the Slot's definingFeature.
4. Access that Slot's value using the slotValue virtual feature, see line 30

Example

```

import-ecore "http://www.nomagic.com/magicdraw/UML/2.5.1"
import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse

data-source Root[Model]
data-source pkg = Root/packagedElement[Package|name="Slots"]
data-source blocks = pkg/packagedElement[Class|mse::metaclassName="SysML::Blocks::Block"]
data-source instances = pkg/packagedElement[InstanceSpecification]

synctable-schema PropertySchema {
    record dim [Class|mse::metaclassName="SysML::Blocks::Block"] {
        key column /name as bName
    }
    dim /ownedAttribute[Property] {
        key column /name as pName
    }
}

synctable-schema Schema*(psc: PropertySchema){
    record dim [InstanceSpecification] {
        key column /name as iName
    }
    dim /slot[Slot] {
        key reference-query .definingFeature @pRef
        reference-decomposition pRef = psc {
            foreign-key column bName as bName
            foreign-key column pName as pName
        }
        column /mse::slotValue as value
    }
}

worksheet-template Template(sc: Schema) {
    vertical table tabl at*(2, 1) = sc {
        key field iName
        key field bName
        key field pName
        field value
        sort-keys iName, bName, pName
    }
}

synctable propertyTable = PropertySchema<blocks>
synctable syncTable = Schema<instances>(propertyTable)

workbook {
    worksheet Template(syncTable)
}

```

11.2 InstanceTree

Description

SysML forces each Slot to be owned by an InstanceSpecification. The regular way to navigate would be from InstanceSpecification to Slot, and without any other mechanisms it

would be hard get a list of the InstanceSpecification tree for a given Slot. Remember that a Slot can have, as values, references to other InstanceSpecifications, and those would be part of tree for that given Slot. Returning this special tree list of InstanceSpecifications is the goal of instanceTree virtual feature.

Syntax

The general syntax for using the instanceTree virtual feature is as follows:

```
dim .alias::instanceTree[InstanceSpecification]
```

Where alias is the alias you assigned to the MapleMBSE ecore.

For more information on assigning aliases, see *Importing the MapleMBSE Ecore (page 3)*. The instanceTree virtual feature must be used in a dimension level after querying a Slot, the return type is a list of reference to the InstanceSpecifications which belong to the tree of the queried Slot.

Using the InstanceTree Virtual Feature

The following example illustrates what you need to do to use the instanceTree virtual feature:

1. Import the MapleMBSE ecore with an alias
2. Create a schema that has a dimension accessing a Slot from an InstanceSpecification, see line 24.
3. The dimension after the Slot one should use the instanceTree, see line 32

Example

```

import-ecore "http://www.nomagic.com/magicdraw/UML/2.5.1"
import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse

data-source Root[Model]
data-source pkg = Root/packagedElement[Package|name="Slots"]
data-source blocks = pkg/packagedElement[Class|mse::metaclassName="SysML::Blocks::Block"]
data-source instances = pkg/packagedElement[InstanceSpecification]

synctable-schema PropertySchema {
  record dim [Class|mse::metaclassName="SysML::Blocks::Block"] {
    key column /name as bName
  }

  dim /ownedAttribute[Property] {
    key column /name as pName
  }
}

synctable-schema Schema (psc: PropertySchema){
  record dim [InstanceSpecification] {
    key column /name as iName
  }

  record dim /slot[Slot] {
    key reference-query .definingFeature @pRef
    reference-decomposition pRef = psc {
      foreign-key column bName as bName
      foreign-key column pName as pName
    }
  }

  dim .mse::instanceTree[InstanceSpecification] {
    key column /name as iNameTree
  }
}

worksheet-template Template(sc: Schema) {
  vertical table tab1 at (2, 1) = sc {
    key field iName
    key field bName
    key field pName
    key field iNameTree
    sort-keys iName, bName, pName
  }
}

synctable propertyTable = PropertySchema<blocks>
synctable syncTable = Schema<instances>(propertyTable)

workbook {
  worksheet Template(syncTable)
}

```

11.3 InstanceWithSlots

Description

It is well known that InstanceSpecifications and their Slots are an essential part of a useful and meaningful model. They are necessary to achieve results, but the task of instantiating, editing, and removing those elements is slow and error prone. MapleMBSE helps to create very complex structures using InstanceWithSlots, when you pass Class as parameter to an InstanceSpecification using this virtual feature, you will see how:

- MapleMBSE updates the list of classifiers that are applied to a given InstanceSpecification
- For each defining property related to that applied class, MapleMBSE will create a Slot defined by a property with its default value.

Syntax

To use instanceWithSlots virtual feature as a column within an InstanceSpecification dimension, the syntax is as follows:

```
reference-query .alias::instanceWithSlots @reference_name
```

This configuration line needs to be completed with a reference-decomposition that uses a Class schema, see the example for further information. Also remember that alias is the alias you assigned to the MapleMBSE ecore.

For more information on assigning aliases, see *Importing the MapleMBSE Ecore (page 3)*.

Using the InstanceWithSlots Virtual Feature

The following example illustrates one way to use the instanceWithSlots virtual feature:

1. Import the MapleMBSE ecore with an alias
2. Create a schema that has a dimension accessing an InstanceSpecification, see line 16.
3. Reference-query instanceWithSlots, see lines 18/19

Example

```

import-ecore "http://www.nomagic.com/magicdraw/UML/2.5.1"
import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse

data-source Root[Model]
data-source pkg = Root/packagedElement[Package|name="Slots"]
data-source blocks = pkg/packagedElement[Class|mse::metaclassName="SysML::Blocks::Block"]
data-source instances = pkg/packagedElement[InstanceSpecification]

synctable-schema BlockSchema {
    record dim [Class|mse::metaclassName="SysML::Blocks::Block"] {
        key column /name as bName
    }
}

synctable-schema Schema (bsc: BlockSchema){
    record dim [InstanceSpecification] {
        key column /name as iName
        reference-query .mse::instanceWithSlots @ bRef
        reference-decomposition bRef = bsc {
            foreign-key column bName as cName
        }
    }
}

worksheet-template Template(sc: Schema) {
    vertical table tabl at (2, 1) = sc {
        key field iName
        field cName
    }
}

synctable blockTable = BlockSchema<blocks>
synctable syncTable = Schema<instances>(blockTable)

workbook {
    worksheet Template(syncTable)
}

```

11.4 RecursiveInstanceWithSlots

Description

The RecursiveInstanceWithSlots virtual feature does the same thing that InstanceWithSlots does but for all possible InstanceSpecifications in the tree. If a Class A is composed by other Class B and you use recursiveInstanceWithSlots to create an InstanceSpecification of Class A, MapleMBSE will also create an InstanceSpecification for Class B with Slots.

Syntax

To use `recursiveInstanceWithSlots` virtual feature as a column within an `InstanceSpecification` dimension, the syntax is as follows:

```
reference-query .alias::recursiveInstanceWithSlots @reference_name
```

This configuration line needs to be completed with a reference-decomposition that uses a Class schema, see the example for further information. Also remember that `alias` is the alias you assigned to the `MapleMBSE` ecore. For more information on assigning aliases, see *Importing the MapleMBSE Ecore (page 3)*.

Using the RecursiveInstanceWithSlots Virtual Feature

The following example illustrates one way to use the `recursiveInstanceWithSlots` virtual feature:

1. Import the `MapleMBSE` ecore with an alias
2. Create a schema that has a dimension accessing an `InstanceSpecification`, see line 16.
3. Reference-query `recursiveInstanceWithSlots`, see lines 18/19

Example

```

import-ecore "http://www.nomagic.com/magicdraw/UML/2.5.1"
import-ecore "http://maplembse.maplesoft.com/common/1.0" as mse

data-source Root[Model]
data-source pkg = Root/packagedElement[Package|name="Slots"]
data-source blocks = pkg/packagedElement[Class|mse::metaclassName="SysML::Blocks::Block"]
data-source instances = pkg/packagedElement[InstanceSpecification]

synctable-schema BlockSchema {
  record dim [Class|mse::metaclassName="SysML::Blocks::Block"] {
    key column /name as bName
  }
}

synctable-schema Schema (bsc: BlockSchema){
  record dim [InstanceSpecification] {
    key column /name as iName
    reference-query .mse::recursiveInstanceWithSlots @ bRef
    reference-decomposition bRef = bsc {
      foreign-key column bName as cName
    }
  }
}

worksheet-template Template(sc: Schema) {
  vertical table tab1 at (2, 1) = sc {
    key field iName
    field cName
  }
}

synctable blockTable = BlockSchema<blocks>
synctable syncTable = Schema<instances>(blockTable)

workbook {
  worksheet Template(syncTable)
}

```

11.5 AttachedFile

Description

The attachedFile virtual feature supports MagicDraw file attachments, which are accessible through comments. It downloads all the relevant file attachments, and displays hyperlinks to temporary locations in the user interface. When the user clicks on the link, the user interface will open the file.

Syntax

The syntax to use attachedFile is as follows:

```
column /mse::attachedFile as fileName
```

Using the attachedFile Virtual Feature

The following example illustrates one way to use the recursiveInstanceWithSlots virtual feature:

1. Import the MapleMBSE.ecore with an alias
2. Create a schema that has a dimension accessing an ownedComment line 5, in the column level call the attached VF see line 6 in the example code

Example

```
synctable-schema AttachedFileSchema {  
  record dim[Package]{  
    key column /name as PkgName  
  }  
  dim /ownedComment[Comment|mse::stereotypeNames="UML Standard  
Profile::MagicDraw Profile::AttachedFile"]{  
    column /mse::attachedFile as fileName  
  }  
}
```

11.6 Slots

Description

Use the Slots virtual feature to add a new slot and display all the slots recursively under a top-level instance. The Slots virtual feature can also be used to delete a child slot under a top level instance and then recreate the child slot.

Syntax

The syntax to use attachedFile is as follows:

```
key column /mse::slotValue as cValue
```

Using the Slots Virtual Feature

The following example illustrates one way to use the Slots virtual feature:

1. Import the MapleMBSE.ecore with an alias
2. Create a schema that has a dimension accessing slots using slots VF showing line 6, slots VF get all the slots Recursively under a instance specification

Example

```
synctable-schema InstanceTable(blk : BlocksTable){
  record dim [InstanceSpecification] {
    key column /name as instanceName
  }

  dim /mse::slots[Slot] {
    key reference-query .definingFeature[Property] @ dfRef
    reference-decomposition dfRef = blk {
      foreign-key column bName as bName
      foreign-key column valName as valName
    }
    key column /mse::slotValue as cValue
  }
}
```


12 Recursivity

12.1 getRecursively

Description

The `getRecursively` virtual feature works as a chained data source, traversing all subelements recursively under the owner data source or QPE and then filters out elements matching the qualifier and filter.

Note: This virtual feature only works for packaged elements.

Syntax

The general syntax for using the `getRecursively` virtual feature is as follows:

```
data-source packages = Root/packageElement[Package|name="C3"]/getRecursively[Package]
```

Where C3 is the name of the package. All packages under C3 will be retrieved.

```
data-source packages = Root/packageElement[Package]/getRecursively[Package]
```

In the above data source syntax example, all the packages under root are retrieved. After that, all the elements (packages) under those packages are retrieved, recursively. When you are adding a new element, in this case, it will go under one of the packages which was retrieved from the root.

Note: This feature only works with elements supporting the `packageElement` feature.

```
data-source packagesC3Class = Root/mse::getRecursively[Package|name="C3"]/packageElement[Class]
```

In the syntax example above, first, `getRecursively` finds the packages under the model. The model may have more than one C3 package. After you have all the packages then you display classes under those packages only, not recursively.

Note that this is maybe very inefficient when the model is big, and it would be much faster to explicitly specify the path for each existing C3 package.

```
data-source packagesC3Class = Root/mse::getRecursively[Package|name="C3"]/ mse::getRecursively[Class]
```

This data source gets all packages recursively and then sorts them and shows the ones named

C3. After that, you get all classes under these C3 packages and any of their subpackages.

Using the getRecursively Virtual Feature

The following example shows you how to use the ownedComments feature.

1. Import the MapleMBSE ecore, as usual the alias used is `mse`
2. Inside a syntable-schema navigate to a *Package*
3. In the next dimension, use `/mse::getRecursively[Class]` to get all the class under the top package(Previous dim/root dim) and sub packages
4. Complete the rest of the configuration as usual: `worksheet-templates`, `synctable` and `workbook`

Example

In this example, the code snippet retrieves all the packages and sub packages under the package C3

```
synctable-schema PackageTable {  
  record dim [Package] {  
    key column /name as pName  
  }  
  record dim / mse:: getRecursively[Class] {  
    key column /name as cName  
  }  
}
```

This feature can be used anywhere in a QPE or data source, but not at the start of QPE or data source.

```
synctable-schema PackageTable {  
  record dim [Package] {  
    key column /name as Name  
  }  
  record dim / mse:: getRecursively[Package] {  
    key column /name as Name1  
  }  
}
```

